


# Performance Rally

## Ergonomic Functional Training Surfacing

BUILT ON  
**itsSTRU**<sup>®</sup>  
TECHNOLOGY

### PRODUCT ATTRIBUTES

- **2.5mm Vulcanized Composition Rubber (VCR) Surface Layer**  
Provides excellent durability and slip resistance
- **12mm Factory Fusion-Bonded VCR Rally Base Layer**  
Upcycled VCR provides premium ergonomic support to the athlete with high force reduction and the proper balance of energy restitution

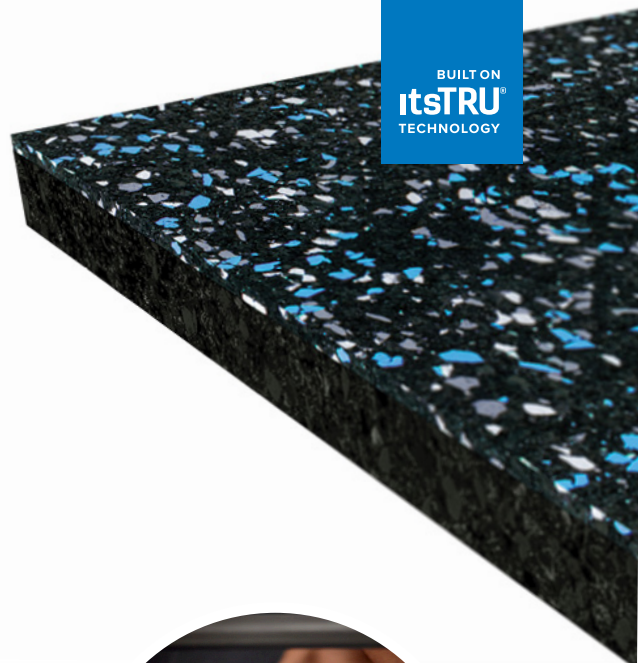

Performance Rally, available in both rolls and interlocking tiles, is an ergonomically advanced surface engineered to absorb the impact force related to aggressive functional training. This surface is ideal for spaces where athletes are constantly on their feet and interacting with the floor.



### APPLICATIONS

- Functional Training
- Selectorized Strength
- Indoor Tracks
- Free Weights
- Therapy / Rehab
- Cardio
- Retail
- Public Spaces
- Childcare / Playzones
- K-12 / Higher Education
- Corporate / Offices

### BENEFITS

- Durable
- Sustainable
- Ease of maintenance
- Slip-resistant
- Provides ergonomic support

### NOMINAL DIMENSIONS

Available as a standard in rolls and interlocking tiles. Talk to your local sales rep to determine availability, pricing, minimums, and lead times.



14.5mm [2.5mm + 12mm] x 48" [1.22m]



14.5mm x 23" [.58m] x 23" [.58m]

*\*Available in select colors*

NRG =




**Force Reduction: 35.4%**  
Absorption of impact energy




**Energy Restitution: 53.7%**  
Useful return of impact energy

*Typical Deltec Field Tester Results*

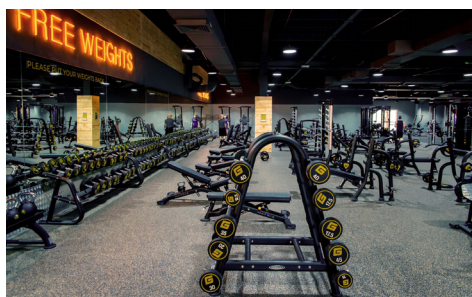


# Performance Rally


## COLOR SWATCHES




Medium Gray ES504




Charcoal ES505




Dark Taupe ES506




Warm Gray ES507




Navy ES508



Green ES509



Maroon ES510



Red ES511




Steel Appeal 2 ES15A




Dark Gray ES502




Mocha Latte 2 ES43A




Blue ES500




Blue Jays\* ES103




Cardinals\* ES104




Raiders\* ES503




Buff Blue 20\* ES45



Rippin Red 20\* ES47



Grippin Gray 20\* ES46



Whey Protein 2\* ES97A



Basic Black \* ES00

\*Available in Interlocking Tiles

## TECHNICAL DETAILS

Performance Criteria	Test Standard	Typical Results
Recovery after Static Load	ASTM F970	0.009"
Coefficient of Friction	ASTM D2047	> 0.8
FloorScore	CA 01350	Certified
Abrasion Resistance	ASTM D3389	Pass
Flammability - Pill Test	ASTM D2859	Pass
Impact Insulation Class (IIC)**	ASTM E492	59
Delta IIC**	ASTM E2179	28

\*\*Tested on a 6" concrete slab with no ceiling.

